



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 362 614 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
19.11.2003 Bulletin 2003/47

(51) Int Cl.7: A61N 1/372, H01Q 9/04

(21) Application number: 02028759.5

(22) Date of filing: 23.12.2002

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SI SK TR
Designated Extension States:
AL LT LV MK RO

(72) Inventors:
• Karlsson, Anders
240 10 Dalby (SE)
• Abrahamson, Hans
113 38 Stockholm (SE)
• Lindberg, Magnus
172 70 (SE)

(30) Priority: 17.05.2002 SE 0201490

(71) Applicant: St. Jude Medical AB
175 84 Järfälla (SE)

(54) Implantable patch antenna

(57) The invention relates to a solution for accomplishing a wireless data exchange between an implantable medical device and an extracorporeal unit by means of an antenna arrangement for communicating radio frequent signals. The proposed arrangement includes a patch plane (210) having a perimeter (a, b, c, d), a ground plane (220) of an electrically conducting material and a dielectric substrate (240) filling a volume between the patch plane (210) and the ground plane (220). The ground plane (220) has an area, which is larger than the patch plane (210) and is located in relation to the patch plane (210), such that a perpendicular projection of the

patch plane (210) onto the ground plane (220) falls entirely within the ground plane (220). A grounding member (230) connects the patch plane (210) electrically to the ground plane (220) at a first segment (d) of the perimeter (a, b, c, d). The substrate (240) has a comparatively high relative permittivity and extends a well-defined distance (L_3' , L_3'') outside the volume between the patch plane (210) and the ground plane (220) with respect to at least one second segment (a, b, c) of the perimeter (a, b, c, d). Thereby, a non-conducting region is obtained outside the patch plane (210) and therefore only a relatively small amount of electromagnetic losses will occur in this region.

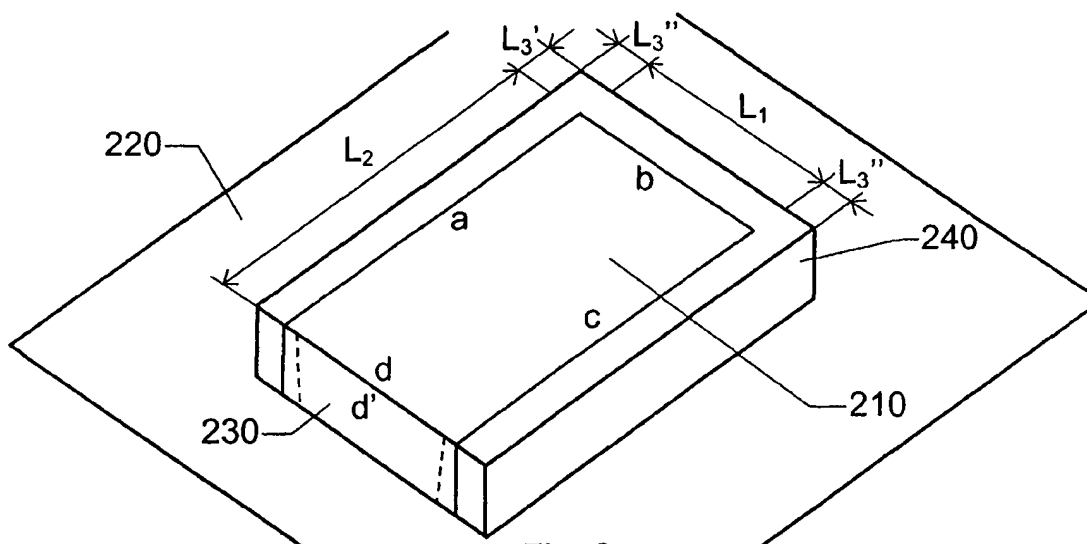


Fig. 2

EP 1 362 614 A1

Description

THE BACKGROUND OF THE INVENTION AND PRIOR ART

[0001] The present invention relates generally to implantable medical devices that are associated with means for wireless data exchange with extracorporal units. More particularly the invention relates to an antenna arrangement according to the preamble of claim 1 and an implantable device according to the preamble of claim 12.

[0002] It is desirable from a patient comfort point of view that an implantable medical device (IMD) can stay in the body for as long time as possible without explanation. Therefore, it is advantageous if the IMD may communicate with the external units while the device is still implanted. Traditionally, status information and measurement parameters have been read out from implanted devices via an inductive telemetry interface. This type of interface is also usable for transportation of data in the opposite direction, for example when adjusting parameters pertaining to the operation of the IMD or when updating the device's program code to a newer version. However, the inductive interface requires a relatively short distance (in the order of centimeters) between the implanted device and the extracorporal unit with which it communicates. This, in turn, may be inconvenient for the patient as well as impractical for the personnel conducting the procedure. Moreover, the maximum data rate for an inductive interface is relatively low, which results in practical limitations as to the amount of data that can be communicated.

[0003] Therefore efforts are now being made in order to find alternative solutions to the inductive telemetry interface for communicating with an IMD. For instance, the American Federal Communications Commission (FCC) and the European Telecommunications Standard Institute (ETSI) have proposed a dedicated radio frequency range in the band 402 - 405 MHz for communication with IMDs. Additionally, the patent literature includes examples of solutions for accomplishing a radio link between an implanted device and an external unit.

[0004] U.S. patent No. 6,115,636 describes a telemetry system for implantable devices where the human body functions as a radio antenna for the implanted device. The housing of the device is here used to accomplish a coupling between the patient's body and the device and thus make possible the transmission of a modulated electromagnetic signal.

[0005] U.S. patent No. 5,626,630 discloses a telemetry solution involving a quasi-passive implanted transponder and a repeater station to be worn externally by the patient. The repeater station thereby operates as a relay between an IMD and a remote monitoring station to provide a communications link with a high data rate. The transponder includes a couple of microstrip radio antennae, which are resonant at one half of the signal

wavelength used.

[0006] U.S. patent No. 5,861,019 shows another example of an IMD equipped with a microstrip radio frequency telemetry antenna. Here, the antenna is formed on or within the exterior surface of the device housing. Preferably, the antenna extends over the entire available surface area of the housing and is covered by a radome layer to ensure that the patch is electrically insulated from body fluids and tissue.

[0007] Although the above-mentioned solutions generally represent improvements in comparison to an inductive link regarding data rate and communication range, they fail to present a telemetry solution with satisfying power efficiency and sufficiently small physical dimensions of the antenna. The size of the antenna is a major concern because the antenna is to be implanted along with the IMD into a human body. For the best patient comfort, a smallest possible physical size of the antenna is desired. However, low power consumption is at least as important. A change of batteries namely inevitably demands explanation of the device, and should therefore be avoided as long as possible.

[0008] The article C. Furse, "Design of an Antenna for Pacemaker Communication," *Microwaves and RF*, March 2000, pp 73 - 76 describes a microstrip antenna for radio signals at a frequency of 433 MHz. It is proposed that an L-, U- or spiral-shaped patch antenna be arranged on top of a 6 mm thick Teflon substrate. The antenna's physical dimensions are thus limited, however its geometry becomes intricate. Moreover, the design is inclined to cause large ohmic losses and consequently not be particularly power efficient.

SUMMARY OF THE INVENTION

[0009] It is therefore an object of the present invention to address these problems and provide an improved implantable antenna solution for an IMD.

[0010] According to one aspect of the invention this object is achieved by an antenna arrangement as described initially, which is characterized in that the substrate has a comparatively high relative permittivity and that the substrate extends a well-defined distance outside the volume between the patch plane and the ground plane with respect to at least one second segment of the perimeter. An important advantage attained by such extension of the substrate is that a non-conducting region is thereby obtained outside the patch plane. This, in turn, guarantees that there will only be relatively small electromagnetic losses in this region. Namely, the electric fields closest to the patch are quasi-static and hence very large. In a conducting medium (such as the human body), however, the dissipated power density is proportional to the square of the electric field. This means that if the region closest to the patch plane were occupied with a conducting material a large amount of the power leaving the patch would be used for heating up the region closest to the patch. Naturally, from a pow-

er efficiency point of view, this is an undesired effect which is avoided by the proposed antenna arrangement. A high relative permittivity is desirable because the required length of the patch plane is inversely proportional to the square root of the relative permittivity. Consequently, a high relative permittivity makes it possible to accomplish an antenna with small physical dimensions. For example, a substrate of a ceramic material is advantageous, since these materials are available with relative permittivities up to around 100. Alternatively, the substrate may contain a laminated thick-film structure including layers of aluminum oxide. Such substrate can be designed with a relative permittivity of approximately 1000.

[0011] According to a preferred embodiment of this aspect of the invention, the substrate overlaps a section of the patch plane along at least one sub-segment of the at least one second segment. An advantage thus attained is that the losses in the dissipative medium represented by the body tissue are further reduced.

[0012] According to yet another preferred embodiment of this aspect of the invention, the grounding member includes a conducting plane, which forms a junction with the patch plane along the first segment. A conducting plane connected along the entire length of the first segment results in a uniform distribution of the electric and the magnetic fields over the antenna section. If however, the conducting plane is less extended than the patch plane the resonance frequency for the antenna decreases to a corresponding extent, which may be desirable in some applications.

[0013] According to another preferred embodiment of this aspect of the invention, the grounding member is substantially perpendicular to the ground plane. It is not necessary for the antenna function that the grounding member is entirely perpendicular to the ground plane, however such orientation results in a more uniform distribution of the electric and the magnetic fields over the antenna section. Feeding the antenna respective extracting a received signal from the antenna is thereby also facilitated. For instance, the antenna arrangement may include a signal member adapted to transport a radio frequency signal between the patch plane and a radio transceiver. The signal member extends through the ground plane via an electrically insulated feedthrough at a particular distance from the grounding member. The signal member includes an element that is substantially perpendicular to the ground plane and is either electrically insulated from the patch plane or connected to a side of the patch plane, which faces towards the ground plane.

[0014] According to another aspect of the invention, this object is achieved by an implantable medical device as described initially, which is characterized in that it includes the proposed antenna arrangement.

[0015] According to a preferred embodiment of this aspect of the invention, the antenna arrangement is located in a recess of an outer side of a casing to the de-

vice. This is advantageous because a slim device design is thus made possible.

[0016] According to a first alternative preferred embodiment of this aspect of the invention, the antenna arrangement is molded into a non-conductive encapsulation, such that the ground plane is electrically insulated from the device's casing. This may be desirable in applications where an absolute control of the ground plane properties is demanded.

[0017] According to a second alternative preferred embodiment of this aspect of the invention, the device's casing instead constitutes the ground plane. Again, this vouches for a slim and uncomplicated design of the device.

[0018] According to yet another preferred embodiment of this aspect of the invention, the patch plane is tilted with respect to the ground plane, such that the arrangement attains horn antenna properties. This, in turn, results in an antenna with an increased bandwidth, since it facilitates the propagation of the outgoing electromagnetic waves. Moreover, the efficiency of the antenna is enhanced due to an increased radiation resistance. Preferably, the patch plane is tilted such that the distance between the patch plane and the ground plane is shortest at a point where the grounding member connects to the patch plane.

[0019] According to still another preferred embodiment of this aspect of the invention, it is presumed that the casing constitutes the ground plane and that the ground plane includes a chamfer. This chamfer is oriented such that the distance between the patch plane and the ground plane extends gradually along a slope of the chamfer and the distance between the ground plane and the patch plane is largest at an edge side being furthest away from the grounding member. Again, this results in an antenna arrangement having properties similar to that of a horn antenna.

[0020] A general advantage with the present invention is that simple antenna geometry is provided, which can be manufactured by means of a fairly uncomplicated production process. Furthermore, the proposed antenna geometry results in relatively low ohmic losses.

[0021] Although the proposed solution is primarily intended for cardiac devices, such as pacemakers and defibrillators, the invention is equally well applicable to any alternative type of implantable medical devices, for example drug pumps, neurostimulators, gastric stimulators, muscle stimulators and hemodynamic monitors.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The present invention is now to be explained more closely by means of preferred embodiments, which are disclosed as examples, and with reference to the attached drawings.

Figure 1 schematically shows an IMD which communicates with an extracorporeal

- unit over a wireless interface according to the invention,
- Figure 2 illustrates the general design of the proposed antenna arrangement,
- Figures 3a-h show top views of alternative patch plane shapes according preferred embodiments of the invention,
- Figure 4 shows a side view of an antenna arrangement according to a first preferred embodiment of the invention,
- Figure 5 shows a side view of an antenna arrangement according to a second preferred embodiment of the invention,
- Figure 6 shows a side view of an IMD including an antenna arrangement according to a first preferred embodiment of the invention,
- Figure 7 shows a side view of an IMD including an antenna arrangement according to a second preferred embodiment of the invention,
- Figure 8 shows a side view of an IMD including an antenna arrangement according to a third preferred embodiment of the invention,
- Figure 9 illustrates an IMD including an antenna arrangement with a tilted patch plane according to a first preferred embodiment of the invention,
- Figure 10 illustrates an IMD including an antenna arrangement with a chamfered ground plane according to a second preferred embodiment of the invention, and
- Figure 11 illustrates an IMD including an antenna arrangement with a convex patch plane and a curved ground plane according to a third preferred embodiment of the invention.

DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

[0023] A wireless communication scenario involving an IMD 110 and an extracorporeal unit 120 is shown schematically in figure 1. Data D and P_c may here be transported in both directions between the IMD 110 and the extracorporeal unit 120 over a radio link C. Typically, parameter settings or updating software P_c is sent from

the unit 120 to the IMD 110 while measurement data D is sent in the opposite direction for various monitoring and diagnostic purposes.

[0024] According to the invention, an antenna arrangement 115 in the IMD 110 is used to exchange modulated electromagnetic energy with the surrounding transmission medium, i.e. the relevant body tissue 130. Specifically, this means that outgoing radio signals D are coupled through the body 130 and out into the contiguous environment, such as the air. The radio signals D then continue to propagate via the air to the extracorporeal unit 120 where they are received, for example by a conventional radio antenna. Correspondingly, incoming radio signals P_c that are received by the IMD 110 have initially been emitted by the unit 120, propagated through the air and penetrated through the body tissue 130 to reach the antenna arrangement 115.

[0025] However, transmitting the same radio signals through a lossy medium, such as the human body, and through a much less lossy medium, such as the air, is a far from trivial task. The transmission media's different permittivities must, of course, be considered. The body tissue's properties may be approximated as being close to those of water in respect to permittivity. This means that the wavelength inside the body is roughly 1/9th to 1/8th of the wavelength in free air. For example, if the radio frequency is 403 MHz, the wavelength becomes 0,74 m in free air and around 9,2 cm inside the body.

[0026] A patch type of antenna is proposed to be included in the antenna arrangement 115 according to the invention. Such antennae are advantageous because they are easy to build using printed circuit technology. Furthermore, the design results in a comparatively low weight antenna, which has small overall dimensions and is relatively inexpensive to manufacture. Preferably, the antenna design is a planar inverted F-antenna (PIFA), which is resonant at one quarter of a wavelength. I.e. the above example would require a PIFA that is 2,3 cm long. In order to obtain a power efficient antenna, the substrate should have a permittivity that results in a wavelength in the substrate which is approximately equal to the wavelength in the surrounding tissue, i.e. the human body.

[0027] The general design of the proposed antenna arrangement 115 is illustrated in figure 2. A patch plane 210 is here adapted to exchange modulated electromagnetic energy with a surrounding transmission medium, i.e. normally body tissue. The depicted patch plane 210 has a general rectangular shape with dimensions L_1 and L_2 and is thus circumscribed by a perimeter including four separate edges a, b, c and d respectively. However theoretically, any alternative shape of the patch plane 210 is conceivable provided that its physical dimensions are adapted to the specific application. It is namely the patch plane's 210 geometry that determines the antenna's impedance and bandwidth. Various examples of alternative patch plane shapes will be discussed below with reference to figures 3a-h.

[0028] Returning to figure 2, a ground plane 220 of an electrically conducting material is located below the patch plane 210. The ground plane 220 has a larger area than the patch plane 210 and is positioned in relation to the patch plane 210, such that a perpendicular projection of the patch plane 210 onto the ground plane 220 falls entirely within the ground plane 220. A dielectric substrate 240 with a comparatively high relative permittivity, say $\epsilon_r = 70$ or more, fills the entire volume between the patch plane 210 and the ground plane 220. The substrate 240 also extends a well-defined distance L_3' and/or L_3'' outside the volume between the patch plane 210 and the ground plane 220 with respect to at least one of the patch plane's 210 edges a, b and c, preferably at least the edge d.

[0029] It is important that the substrate 240 extends L_3' , L_3'' outside the patch plane 210 because thereby a non-conducting region is obtained outside the patch plane 210, where otherwise electrically conducting body tissue would be located. The extension of the substrate 240 guarantees that there will only be a relatively small amount of electromagnetic losses in these regions. The electric fields closest to the patch plane 210 are quasi-static and hence comparatively large. In a conducting medium the dissipated power density is proportional to the square of the electric field. This means that had the region closest to the patch plane 210 been occupied with a conducting material, such as body tissue, a large amount of the power leaving the antenna would be used for heating up the region closest to the patch plane 210. However, the distance L_3' , L_3'' between the patch plane 210 and the closest conducting region established by the extended substrate 240 accomplishes a volume over which the electric field may decrease without losses. The proposed design is thus very advantageous with respect to power efficiency. Further details pertaining to the relevant dimensions will be discussed below with reference to figures 4 and 5.

[0030] According to the above-described embodiment of the invention, a grounding member 230 connects the patch plane 210 electrically to the ground plane 220. Preferably, the grounding member 230 includes a conducting plane, which forms a junction d' with the patch plane 210 along a substantial part of one of the patch plane's edge d. It is generally most preferred if the conducting plane of the grounding member 230 extends along the entire length of the edge d, i.e. a distinct segment of the patch plane's 210 perimeter. A conducting plane whose width equals the patch plane's 210 edge d namely results in a uniform distribution of the electric and the magnetic fields over the antenna section. However, the conducting plane of the grounding member 230 need only extend along a sub-segment of the edge d. If however, the conducting plane is less extended than the patch plane the resonance frequency for the antenna decreases to a corresponding extent, which may be desirable in some applications. Figure 2 shows a grounding member 230 with a shortened con-

ducting plane by means of dashed lines. Note that the conducting plane edges may have arbitrary orientation in relation to the ground plane 220.

[0031] As already mentioned, the dielectric substrate 240 preferably has a high relative permittivity. The required length L_2 of the patch plane 210 is namely inversely proportional to the square root of the substrate's 240 relative permittivity. Consequently, a high relative permittivity reduces the patch plane's 210 physical dimensions L_1 and L_2 . A ceramic material may be used to accomplish a substrate 240 with a moderate relative permittivity, in the order of 100. If higher values of the relative permittivity are required, the substrate 240 should preferably include a laminated thick-film structure, for instance with layers of aluminum oxide. Thereby, relative permittivities up to 1000 may be accomplished.

[0032] Figures 3a-h illustrate examples of alternative patch plane 210 shapes according to embodiments of the invention. The first four figures 3a-d represent patch plane 210 shapes that result in comparatively narrow-band antennae. Namely, the perpendicular distance between the perimeter segment d being attached to the grounding member and an opposite non-grounded perimeter segment is here constant. Figures 3e-h, however, represent patch plane 210 shapes that result in antennae, which are operable over a broader bandwidth because here the perpendicular distance between the perimeter segment d being attached to the grounding member and an opposite non-grounded perimeter segment varies. For example, the patch plane 210 shape shown in figure 3f provides an antenna adapted to operate over three distinct frequency bands, which are given by the perpendicular distances between the perimeter segment d and the perimeter segments b_1 , b_3 and b_5 respectively, whereas the patch plane 210 shape shown in figure 3e provides an antenna adapted to operate over one comparatively wide frequency band.

[0033] According to a preferred embodiment of the invention, the grounding member 230 is substantially perpendicular to the ground plane 220. This namely results in a uniform distribution of the electric and the magnetic fields over the antenna section. Moreover, feeding the antenna and extracting a received signal from the antenna is facilitated by such design. This matter will be discussed in further detail below with reference to figures 4 and 5.

[0034] Figure 4 shows a side view of an antenna arrangement 115 according to a first preferred embodiment of the invention. The arrangement 115 includes a signal member 310, which is adapted to transport a radio frequency signal between the patch plane 210 and a radio transceiver. I.e. the signal member 310 may be used either to feed a radio signal to the patch plane 210 or to extract a received radio signal there from. The signal member 310 has a cylindrical element, which is substantially perpendicular to the ground plane 220 and extends through the ground plane 220 via an electrically

insulated feedthrough 320. The feedthrough 320 is positioned at a distance F from the grounding member 230, where F is selected with respect to the substrate 240 and the properties of the radio signal used, such that a desired impedance of the antenna is obtained. In this embodiment, the signal member 310 ends with a radiating element, which is electrically insulated from the patch plane 210.

[0035] The substrate 240 has a thickness H_1 and extends a distance L_3' outside the edge b of the patch plane 210. According to a preferred embodiment of the invention, the distance L_3' is proportional to the length L_2 of the patch plane 210, such that L_3' lies in the interval 10-30% of L_2 , and preferably around 20% of L_2 . According to a preferred alternative of this embodiment of the invention, the substrate 240 also extends a distance L_3'' outside the edges a and c of the patch plane 210 (see figure 2). The distance L_3'' is likewise proportional to the length L_2 , such that L_3'' lies in the interval 10-20% of L_2 , preferably at least 15%.

[0036] The specific relationships L_3' -to- L_2 and L_3'' -to- L_2 can be explained as follows. The efficiency of a transmitting antenna operating in air is defined by the ratio between the power delivered to the antenna and the power radiated from the antenna. The sum of the losses in the substrate and in the conducting parts determines the antenna's efficiency. For an implanted transmitting antenna, however, it is relevant to define the overall efficiency of the antenna system as the ratio between the power delivered to the antenna and the power radiated from the body. Thus, the efficiency is now determined both by the losses in the antenna and in the lossy medium represented by the body tissue. The ohmic power loss density P_{loss} (W/m³) in a conductive medium is given by the expression:

$$P_{\text{loss}} = \frac{1}{2} \mathbf{J} \cdot \mathbf{E}^* = \frac{1}{2} \sigma |\mathbf{E}|^2$$

where σ is the conductivity of the medium and E is the electric field. A tissue consisting of muscles has a relatively high conductivity ($\sigma \approx 1,4$ at a frequency around 400 MHz including dielectric losses). Hence, the efficiency of the antenna system becomes rather low if the antenna is surrounded by muscle tissue. As is apparent from the above expression, the power loss density P_{loss} is high in regions where the electric field is high. The electric field shows high values in the near zone of the patch plane, since in that region the field is dominated by the non-radiating near field. In the PIFA-case, the near zone is the region close to the outside of the non-grounded segments of the patch plane perimeter (i.e. for example the edges a, b and c in the figure 2).

[0037] Figure 5 shows a side view of an antenna arrangement 115 according to a second preferred embodiment of the invention. In this embodiment, the signal member 310, is electrically connected to the side of the patch plane 210, which faces towards the ground plane

220. The signal member 310 is also here substantially perpendicular to the ground plane 220 and extends through the ground plane 220 via an electrically insulated feedthrough 320. The feedthrough 320 is positioned at a distance F from the grounding member 230, where F is selected with respect to the substrate 240 and the properties of the radio signal used, such that a desired impedance of the antenna is obtained.

[0038] The substrate 240 has a thickness H_1 and does here not only extend a distance L_3' outside the edge b of the patch plane 210, however it also overlaps L_4' a section of the patch plane 210 along at least one edge, for example the edge b. In analogy with the embodiment of the invention described above with reference to the figures 2 and 3, the distance L_3' is preferably proportional to the length L_2 of the patch plane 210. The same is basically true for the overlap L_4' , however it is sufficient if L_4' corresponds to 10% of L_2 . The thickness H_2 of the overlap should correspond to at least 5% of the length L_2 of the patch plane 210. In any case, the overlap assists in further reducing the losses in the dissipative medium represented by the body tissue.

[0039] The features of the signal member 310 being electrically connected to the patch plane 210 (as shown in figure 5) respective being insulated from the patch plane 210 (as shown in figure 4) and the substrate 240 overlapping L_4' , H_2 a section of the patch plane 210 (as shown in the figure 4) respective merely extending a well-defined distance L_3' (as shown in the figure 4) may be combined arbitrarily. The specific combinations of these features as shown in figures 4 and 5 have merely been chosen for illustrating purposes.

[0040] Figure 6 shows a side view of an IMD including an antenna arrangement 115 according to a first preferred embodiment of the invention. The arrangement 115 is located on the outer surface of an IMD casing, such that the casing 111 constitutes the ground plane 220. A straightforward design being relatively inexpensive to manufacture is thus made possible.

[0041] Figure 7 shows a side view of an IMD including an antenna arrangement 115 according to a second preferred embodiment of the invention. Also here the casing 111 to the device constitutes the ground plane 220. However, the arrangement 115 is now located in a recess 710 of an outer side of the casing 111. This type of design is often preferable, since due to the fact the electric field decreases with increasing substrate thickness, a relatively thick antenna is also comparatively power efficient. By mounting antenna arrangement 115 in the recess 710 it is thus possible to have a rather thick antenna with a high efficiency and at the same time accomplish a slim device.

[0042] Figure 8 shows a side view of an IMD including an antenna arrangement 115 according to a third preferred embodiment of the invention, where the entire arrangement 115 is molded into a non-conductive encapsulation 820. The encapsulation 820 insulates a ground plane 220 in the arrangement 115 electrically from the

casing 111 to the device. Thereby a complete control of the ground plane's 810 properties can be obtained.

[0043] Figure 9 illustrates an IMD including an antenna arrangement 115 with a tilted patch plane 210' according to a first preferred embodiment of the invention. Again, the casing 111 to the device constitutes the ground plane 220. The patch plane 210', however, is tilted with respect to the ground plane 220, such that the patch plane 210' is parallel to the ground plane 220 exclusively in one dimension. Hence, the arrangement 115 attains signal properties that resemble those of a horn antenna. For instance, the bandwidth increases. The radiation resistance also raises, which results in a decreased electric field and an enhanced power efficiency.

[0044] Preferably, the patch plane 210' is tilted such that the distance between the patch plane 210' and the ground plane 220 is shortest at a point where a grounding member 230 connects to the patch plane 210'.

[0045] Figure 10 illustrates an IMD including an antenna arrangement 115 with a chamfered ground plane 220 according to a second preferred embodiment of the invention. Again, the casing 111 to the device constitutes the ground plane 220. Although not actually necessary in this embodiment the patch plane 210" is also tilted with respect to the ground plane 220, such that the patch plane 210" is parallel to the ground plane 220 exclusively in one dimension. More important however, a portion of the casing 111, which constitutes the ground plane 220 here includes a chamfer 1010. This chamfer 1010 is oriented such that the distance between the patch plane 210" and the ground plane 220 extends gradually along a slope of the chamfer 1010. Furthermore, the chamfer 1010 is placed such that the distance between the ground plane 220 and the patch plane 210" is largest at the patch plane edge (edge b in figure 2) being furthest away from a grounding member 230. This design accentuates the horn antenna properties and the thus attained advantages mentioned above.

[0046] Figure 11 illustrates an IMD including an antenna arrangement 115 with a convex patch plane 210"" and a curved ground plane 220 according to a third preferred embodiment of the invention. Here, the patch plane 210"" has a general curved profile with a convex face towards the ground plane 220. Again, the casing 111 to the device constitutes the ground plane 220. In this embodiment, the substrate 240 extends over the curved side 1110 of the casing 111, such that the substrate 240 forms a tapered section towards the curved side 1110, which is furthest away from a grounding member 230. Thereby, an alternative horn antenna design is accomplished.

[0047] The term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components. However, the term does not preclude the presence or addition of one or more additional features, integers, steps or components or groups thereof.

[0048] The invention is not restricted to the described

embodiments in the figures, but may be varied freely within the scope of the claims.

5 Claims

1. An antenna arrangement (115) for communicating radio frequent signals with an implantable medical device, comprising:

a patch plane (210) adapted to exchange modulated electromagnetic energy with a surrounding transmission medium, the patch plane (210) having a perimeter (a, b, c, d),

a ground plane (220) of an electrically conducting material having an area which is larger than the patch plane (210), the ground plane (220) being located in relation to the patch plane (210) such that a perpendicular projection of the patch plane (210) onto the ground plane (220) falls entirely within the ground plane (220),

a dielectric substrate (240) filling a volume between the patch plane (210) and the ground plane (220), and

a grounding member (230) electrically connecting the patch plane (210) to the ground plane (220), the grounding member being attached to a first segment (d) of the perimeter (a, b, c, d), **characterized in that**

the substrate (240) has a comparatively high relative permittivity and extends a well-defined distance (L_3' , L_3'') outside the volume between the patch plane (210) and the ground plane (220) with respect to at least one second segment (a, b, c) of the perimeter (a, b, c, d).

2. An antenna arrangement (115) according to claim 1, **characterized in that** the substrate (240) overlaps (L_4' , H_2) a section of the patch plane (210) along at least one sub-segment (b) of the at least one second segment (a, b, c).

3. An antenna arrangement (115) according to any one of the preceding claims, **characterized in that** the grounding member (230) includes a conducting plane which forms a junction (d') with the patch plane (210) along the first segment (d).

4. An antenna arrangement (115) according to any one of the preceding claims, **characterized in that** the grounding member (230) is substantially perpendicular to the ground plane (220).











5. An antenna arrangement (115) according to any one of the preceding claims, **characterized in that** it comprises a signal member (310) adapted to

transport a radio frequency signal between the patch plane (210) and a radio transceiver.

6. An antenna arrangement (115) according to claim 5, **characterized in that** the signal member (310) is electrically insulated from the patch plane (210). 5
7. An antenna arrangement (115) according to claim 5, **characterized in that** the signal member (310) is electrically connected to a side of the patch plane (210) which faces towards the ground plane (220). 10
8. An antenna arrangement (115) according to any one of the claims 6 or 7, **characterized in that** the signal member (310) extends through the ground plane (220) via an electrically insulated feedthrough (320) at a distance (F) from the grounding member (230). 15
9. An antenna arrangement (115) according to any one of the preceding claims, **characterized in that** the substrate (240) comprises a ceramic material. 20
10. An antenna arrangement (115) according to any one of the claims 1 - 9, **characterized in that** the substrate (240) comprises a laminated thick-film structure. 25
11. An antenna arrangement (115) according to claim 10, **characterized in that** the laminated thick-film structure includes at least one layer of aluminum oxide. 30
12. An implantable medical device, **characterized in that** it comprises an antenna arrangement (115) according to any one of the claims 1 - 11. 35
13. An implantable medical device according to claim 12, **characterized in that** the antenna arrangement (115) is located in a recess (710) of an outer side of a casing (111) to the device. 40
14. An implantable medical device according to any one of the claims 12 or 13, **characterized in that** the antenna arrangement (115) is molded into a non-conductive encapsulation (820) such that the ground plane (220) is electrically insulated from a casing (111) to the device. 45
15. An implantable medical device according to any one of the claims 12 or 13, **characterized in that** a casing (111) to the device constitutes the ground plane (220). 50
16. An implantable medical device according to any one of the claims 12 - 15, **characterized in that** the patch plane (210', 210'') is tilted with respect to the ground plane (220) such that the patch plane (210', 55

210'') is parallel to the ground plane (220) exclusively in one dimension.

17. An implantable medical device according to claim 16, **characterized in that** the antenna arrangement (115) comprises a grounding member (230) which connects the patch plane (210) electrically to the ground plane (220), and a distance between the patch plane (210', 210'') and the ground plane (220) is shortest at a point where the grounding member (230) connects to the patch plane (210', 210'').
18. An implantable medical device according to claim 17, **characterized in that** the portion of the casing (111) which constitutes the ground plane (220) includes a chamfer (1010), the chamfer (1010) being oriented such that the distance between the patch plane (210'') and the ground plane (220) extends gradually along a slope of the chamfer (1010) and the distance between the ground plane (220) and the patch plane (210'') being largest at an edge (b) being furthest away from the grounding member (230).
19. An implantable medical device according to claim 17, **characterized in that** the substrate (240) extends over a curved side (1110) of the casing (111) such that the substrate (240) forms a tapered section towards the curved side (1110), the curved side (1110) being furthest away from the grounding member (230).
20. An implantable medical device according to any one of the claims 18 or 19, **characterized in that** the patch plane (210''') has a general curved profile with a convex face towards the ground plane (220).

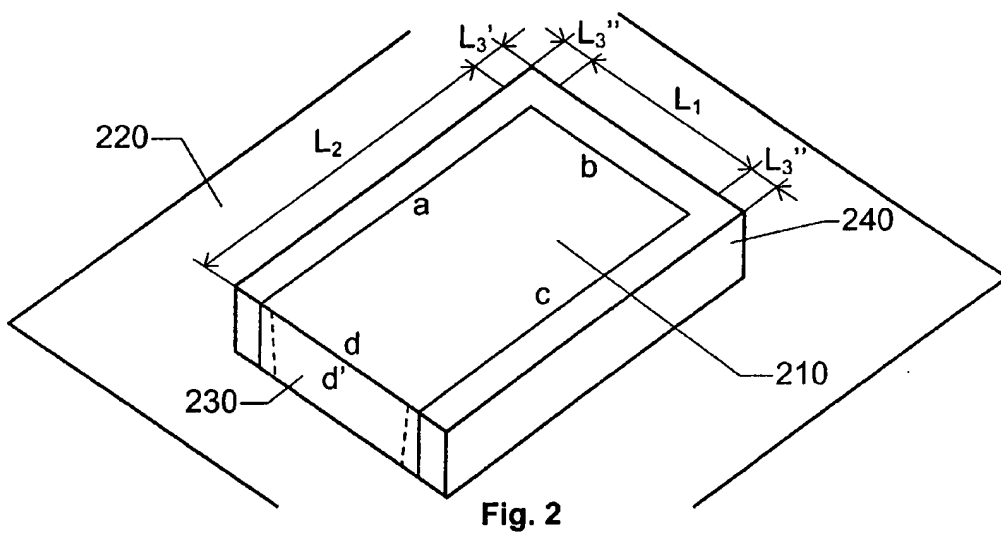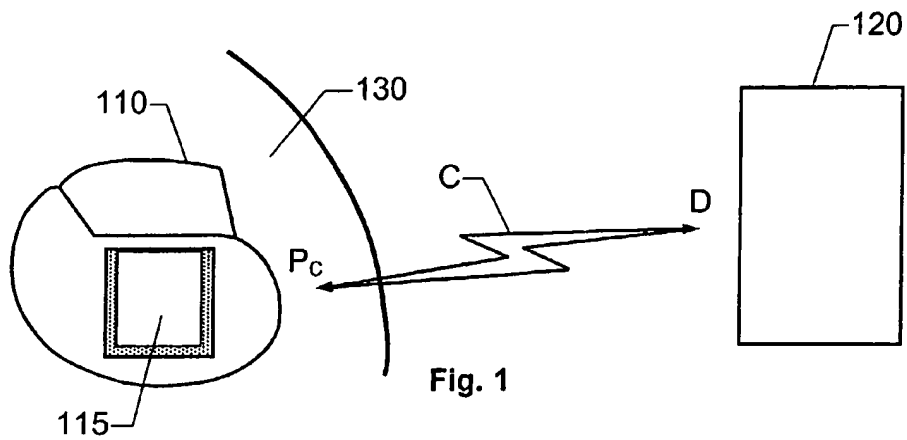

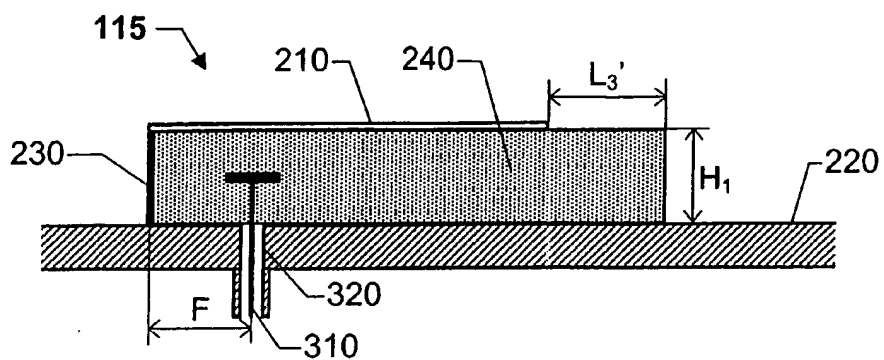


Fig. 4

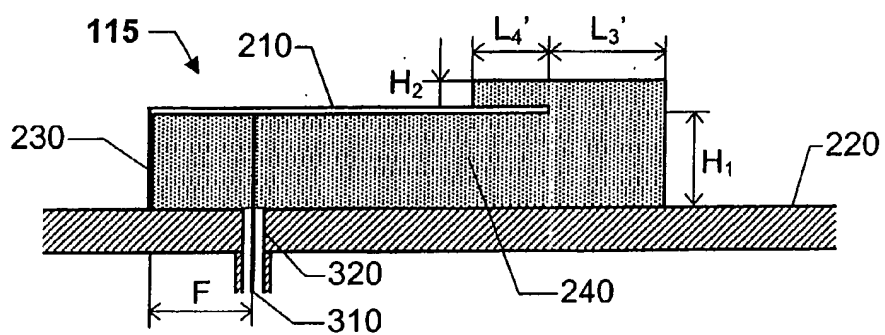


Fig. 5

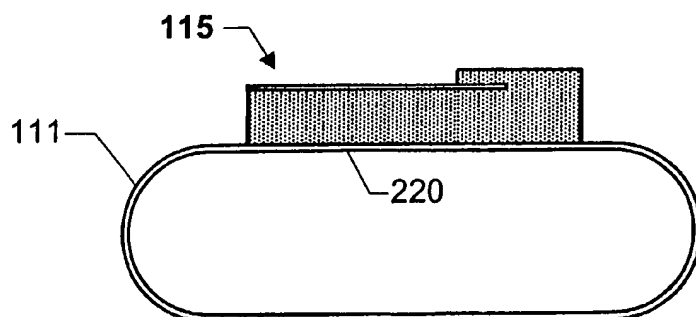


Fig. 6

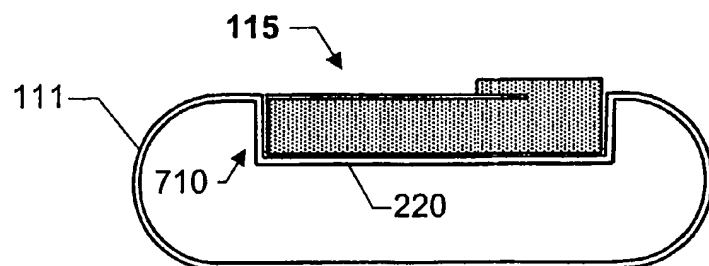


Fig. 7

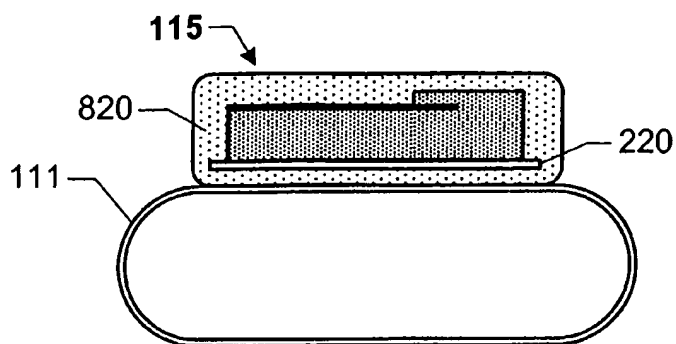


Fig. 8

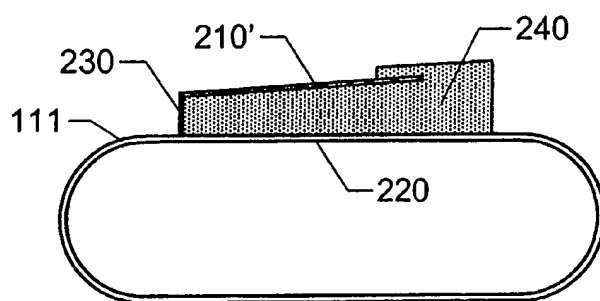


Fig. 9

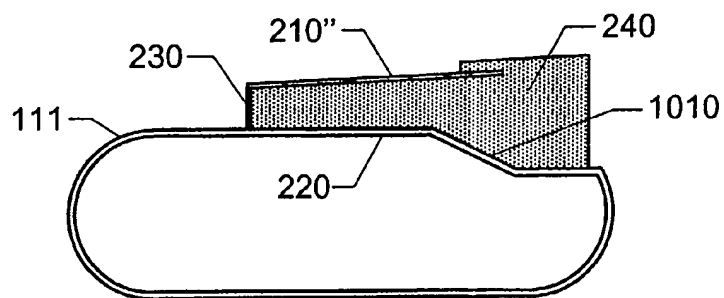


Fig. 10

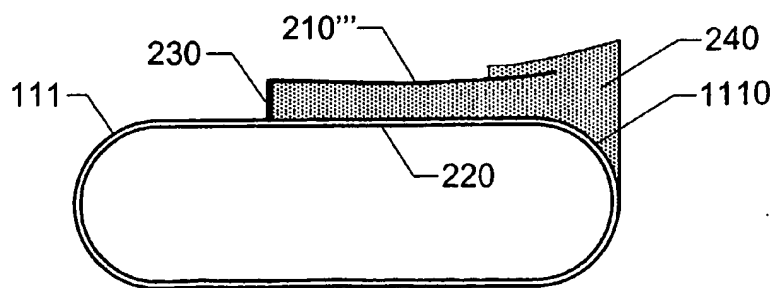


Fig. 11



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 02 8759

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y,D	US 5 861 019 A (DUBLIN GARRY L ET AL) 19 January 1999 (1999-01-19) * abstract; figures 1,2,10,14,15 * * column 5, line 23 - column 6, line 55 * ---	1,2,4-8, 12	A61N1/372 H01Q9/04
Y	DE 31 50 235 A (LICENTIA GMBH) 30 June 1983 (1983-06-30) * claim 1; figure 2 * -----	1,2,4-8, 12	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A61N H01Q
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 16 September 2003	Examiner Gaillard, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 8759

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5861019	A	19-01-1999	NONE	---
DE 3150235	A	30-06-1983	DE 3150235 A1	30-06-1983

EPO FORM P/459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.